
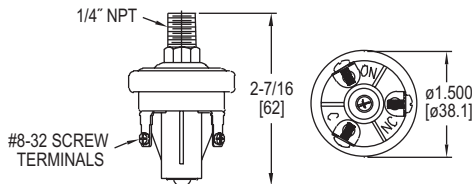


**Dwyer****SERIES A6 | MERCOID® BY DWYER**

# DURABLE PRESSURE SWITCHES

## Designed for Extended Duty, Simple and Reliable

**A-439****A-440****A-439****A-440**

**Series A6 Durable Pressure Switches** have been specifically designed to stand up to extended duty applications. These switches are constructed with a polyimide film diaphragm and are compatible with a variety of fluids. For ease of installation, the switches come with a 1/4" male NPT process connection and can be mounted in any orientation. The Series A6 pressure switches are compact and have great set-point integrity, and feature simple, easy set-point field adjustment.

### FEATURES/BENEFITS

- High switch cycle means long life for extended duty applications
- Mounting in any position and feature simple makes a reliable switching for equipment and OEM applications

### APPLICATIONS

- OEM
- Process equipment
- Process applications

### MODEL CHART

Model	Set Point Range psi (bar)	
	NC	NO
<b>A6-153221</b>	0.5 to 1 (0.03 to 0.07)	1.1 to 3.1 (0.08 to 0.21)
<b>A6-253221</b>	1.1 to 3 (0.08 to 0.21)	2.27 to 6.05 (0.16 to 0.42)
<b>A6-353221</b>	3.1 to 7 (0.21 to 0.48)	4.22 to 10.75 (0.29 to 0.74)
<b>A6-453221</b>	8 to 13 (0.55 to 0.90)	12.3 to 17.5 (0.85 to 1.21)
<b>A6-553221</b>	14 to 24 (0.97 to 1.66)	18.6 to 31.8 (1.28 to 2.19)
<b>A6-653221</b>	25 to 50 (1.73 to 3.45)	33.1 to 61 (2.28 to 4.21)
<b>A6-753221</b>	51 to 90 (3.52 to 6.21)	65.6 to 112.3 (4.53 to 7.75)
<b>A6-853221</b>	91 to 150 (6.28 to 10.35)	114.7 to 198.3 (7.94 to 13.68)

### SPECIFICATIONS

**Service:** Air, motor oils, transmission oils, jet fuels, and similar hydrocarbon media. (Not for water use)

**Wetted Materials:** Base: 304 SS; Diaphragm: Polyamide film.

**Temperature Limits:** -40 to 248°F (-40 to 120°C).

**Pressure Limits:** Operating pressure: 150 psi (10.3 bar) for 0.5-24 psi set point ranges, 250 psi (17.2 bar) for 25 to 150 psi set-point ranges; Proof pressure: 500 psi (34.5 bar); Burst pressure: 750 psi (51.7 bar) for 0.5-24 psi set point ranges, 1250 psi (86.2 bar) for 25-150 psi set point ranges.

**Enclosure Rating:** General purpose or with cover: IP65 - weatherproof.

**Repeatability:** ±10% of set point.

**Set Point Tolerance:** ±15% of range.

**Switch Type:** 1 SPST NO, 1 SPST NC. NO and NC switch independent from each other.

**Electrical Ratings:** Resistive: 15 A @ 6 VDC, 8 A @ 12 VDC, 4 A @ 24 VDC; Inductive: 1 A @ 120 VAC, 0.5 A @ 240 VAC.

**Electrical Connections:** #8-32 screw terminals.

**Process Connection:** 1/4" NPT male. **Mounting Orientation:** Switch can be installed in any position.

**Set-point Adjustment:** Screw.

**Weight:** 0.13 lb (0.06 kg).

### ACCESSORIES

Model	Description
<b>A-439</b>	Weatherproof IP65 cover
<b>A-440</b>	Weatherproof IP65 with fly-wire holes

USA: California Proposition 65

⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)