




Series  
DM-2000

# Differential Pressure Transmitter

Same Size as Standard Magnehelic® Differential Pressure Gage

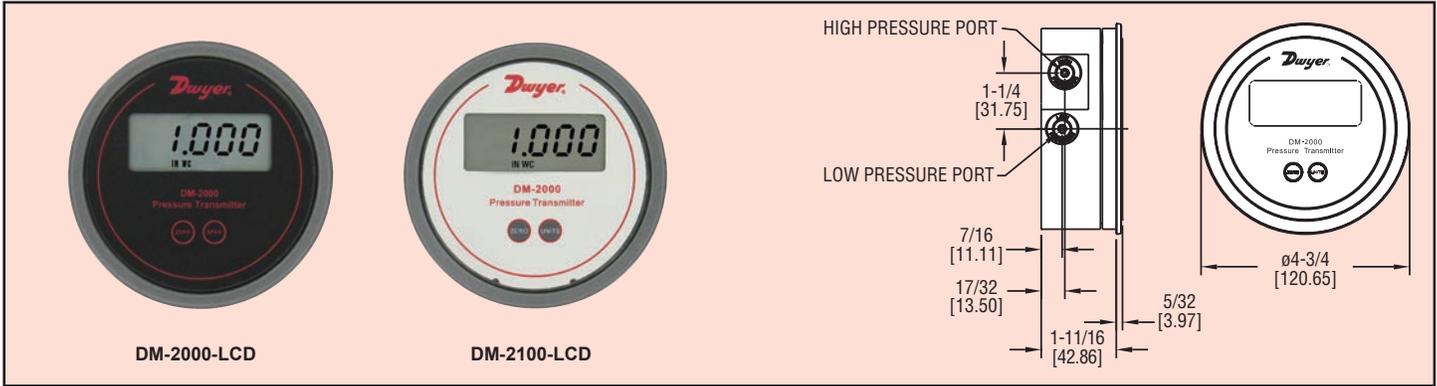

The Dwyer Series DM-2000 Differential Pressure Transmitter senses the pressure of air and compatible gases and sends a standard 4-20 mA output signal. The DM-2000 enclosure is specifically designed to mount in the same diameter cutout as a standard Magnehelic® gage. A wide range of models are available factory calibrated to specific ranges.

Pressure connections are inherent to the glass filled plastic molded enclosure making installation quick and easy. Digital push-button zero simplifies calibration over typical turnpotentiometers. An optional 3.5 digit LCD shows process and engineering units. A single push button allows field selection of 4 to 6 engineering units depending on range.

#### APPLICATIONS

- Differential pressure across filters
- Fan control
- Static pressures in ducts or buildings

#### SPECIFICATIONS

- Service:** Air and non-combustible, compatible gases.
- Wetted Materials:** Consult factory.
- Accuracy:** ±1% FS at 70°F.
- Stability:** ±1% FS/yr.
- Temperature Limits:** 20 to 120°F (-6.67 to 48.9°C).
- Pressure Limits:** 10 psig (0.69 bar).
- Thermal Effect:** ±0.055% FS/°F (0.099% F.S./°C).
- Power Requirements:** 10-35 VDC (2 wire).
- Output Signal:** 4 to 20 mA.
- Zero and Span Adjustments:** Digital push-button zero and span.
- Loop Resistance:** DC: 0-1250 Ω maximum.
- Current Consumption:** DC: 38 mA max.
- Electrical Connections:** Screw-type terminal block.
- Display:** 3.5 digit LCD, 0.7" H.
- Process Connections:** 1/8" ID tubing.
- Mounting Orientation:** Vertical.
- Weight:** 4.8 oz (136 g).

Model	Range	Pa	mm wc	mBar	kPa	psi
DM-2001-LCD	.100 in w.c.	24.9	2.54	.249		
DM-2002-LCD	.250 in w.c.	62.2	6.35	.622		
DM-2003-LCD	.500 in w.c.	124.3	12.70	1.243	.124	
DM-2004-LCD	1.000 in w.c.	249	25.4	2.49	.249	
DM-2005-LCD	2.00 in w.c.	497	50.8	4.97	.497	.108
DM-2006-LCD	3.00 in w.c.	746	76.2	7.46	.746	.180
DM-2007-LCD	5.00 in w.c.	1243	127.0	12.43	1.243	
DM-2012-LCD	.250-0-.250 in w.c.	62.2-0-62.2	3.65-0-6.35	.622-0-.622		
DM-2013-LCD	.500-0-.500 in w.c.	124.3-0-124.3	12.70-0-12.70	1.243-0-1.243		
DM-2019-LCD	-0.05-0-.200 in w.c.	49.8	5.08	.498		

#### OPTIONS

For NIST traceable calibration certificate, add suffix -NIST to model numbers.

Example: DM-2002-LCD-NIST

For factory calibration certificate, add suffix -FC to model numbers.

Example: DM-2002-LCD-FC

For white overlay change -20 to -21.

Example: DM-2102-LCD

#### ACCESSORIES

**A-299**, Surface Mounting Bracket

**A-300**, Flat Flush Mounting Bracket

**A-302F-A**, 303 SS Static Pressure Tip with mounting flange. For 3/16" ID rubber or plastic tubing. 4" insertion depth. Includes mounting screws

**A-320-A**, Instrument Enclosure

**A-489**, 4" Straight Static Pressure Tip with Flange

**SCD-PS**, 100 to 240 VAC/VDC to 24 VDC Power Supply

Process Tubing Options: See page 547 (Gage Tubing Accessories)