


**LI5141**

LI0132-K-00KNPKG/US

Level sensors

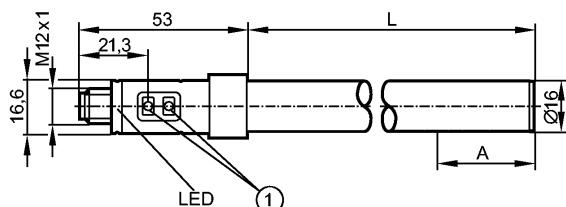

1: Programming buttons



Made in Germany

Product characteristics

Binary level sensor

Connector

Gold-plated contacts

Probe length: L = 132 mm

1 switching output

Application

Application	Hydrous coolants, oils, water, media similar to water
Recommended media	Hydrous coolants, oils, water, media similar to water
Cannot be used for:	granulates and bulk materials, acids and alkalis, hygienic and electroplating applications
Dielectric constant medium	> 1.8

Medium temperature oil

- Continuous	[°C]	0...65
- Short time	[°C]	0..80
Medium temperature water and hydrous media	[°C]	0...35 (LI5141 + E43103: 0...65) **)

Electrical data

Electrical design	DC PNP
Operating voltage	[V]
Current consumption	[mA]
Protection class	III
Reverse polarity protection	yes

Outputs

Output	1 switching output
Output function	normally open / closed programmable
Current rating	[mA]
Voltage drop	[V]
Short-circuit protection	pulsed
Overload protection	yes

Measuring / setting range

Probe length L	[mm]	132
Active range A	[mm]	31

Environment

Ambient temperature	[°C]	-25...80
Maximum vessel pressure	[bar]	+/- 0.5 (when mounted with mounting accessories E43001 - E43007)
Protection		IP 65 / IP 67

Tests / approvals

**LI5141**

LI0132-K-00KNPKG/US

Level sensors

EMC	EN 61000-6-2 EN 61000-6-4	: 2005 + corr. 2005 : 2007
Shock resistance	DIN EN 60068-2-29:	12 g (11 ms)
Vibration resistance	DIN EN 60068-2-6:	5 g (10...2000 Hz)
MTTF [Years]		608
Mechanical data		
Materials (wetted parts)		PP
Housing materials		PP GF30; TPE-U
Weight [kg]		0.149
Displays / operating elements		
Display	Operation Switching status	LED green LED yellow
Electrical connection		
Connection	M12 connector; Gold-plated contacts	
Wiring		
2 1 3 4		
Remarks		
Remarks	cULus - Class 2 source required **) for water and hydrous media with temperatures > 35 °C install the unit into a climatic tube (order no. E43103)	
Pack quantity [piece]		1