


**PK6521**

PK-250-SFG14-HCPKG/US/ /W

Pressure sensors

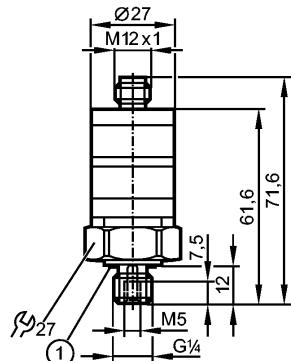

1: sealing FPM / DIN 3869-14

**Product characteristics**

Electronic pressure monitor

Connector

Process connection: G 1/4 A / M5 I

2 switching outputs
normally open / closed complementary

Measuring range: 0...250 bar / 0...3625 psi

Application

Application	Type of pressure: relative pressure Liquids and gases
Pressure rating	400 bar
Bursting pressure min.	1000 bar
Medium temperature [°C]	-25...80

Electrical data

Electrical design	DC PNP
Operating voltage [V]	9.6...32 DC
Current consumption [mA]	< 25
Insulation resistance [MΩ]	> 100 (500 V DC)
Protection class	III
Reverse polarity protection	yes

Outputs

Output	2 switching outputs normally open / closed complementary
Output function	complementary
Current rating [mA]	500
Voltage drop [V]	< 2
Short-circuit protection	pulsed
Overload protection	yes
Switching frequency [Hz]	100

Measuring / setting range

Measuring range	0...250 bar	0...3625 psi
Setting range		
Set point, SP	12.5...250 bar	181...3625 psi

Reset point, rP 7.5...245 bar 109...3553 psi

**PK6521**

PK-250-SFG14-HCPKG/US/ /W

Pressure sensors

Accuracy / deviations

Deviations (% of value of measuring range)

Switch point accuracy	< ± 2.5 *)
Characteristics deviation	< ± 1.5 (BFSL) / < ± 2.5 (LS) **)
Repeatability	< ± 0.5
Temperature drift (/ 10 K)	< ± 0.5
in the temperature range [°C]	0...80

Software / programming

Adjustment of the switch point	setting rings
--------------------------------	---------------

Environment

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-40...100
Protection	IP 67

Tests / approvals

EMC	EN 61000-4-2 ESD: EN 61000-4-3 HF radiated: EN 61000-4-4 Burst: EN 61000-4-5 Surge: EN 61000-4-6 HF conducted:	4 kV CD / 8 kV AD 10 V/m 2 kV 1 kV signal for DC units 10 V
Shock resistance	DIN IEC 68-2-27:	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6:	20 g (10...2000 Hz)
MTTF [Years]		540

Mechanical data


Process connection	G 1/4 A / M5 I
Materials (wetted parts)	stainless steel 316L / 1.4404; FPM (Viton)
Housing materials	PBT (Pocan); PC (Makrolon); FPM (Viton); stainless steel 316L / 1.4404
Switching cycles min.	50 million
Tightening torque [Nm]	25
Weight [kg]	0.095

Displays / operating elements

Display	Operation LED green Switching status LED yellow
---------	--

Electrical connection

Connection	M12 connector
------------	---------------

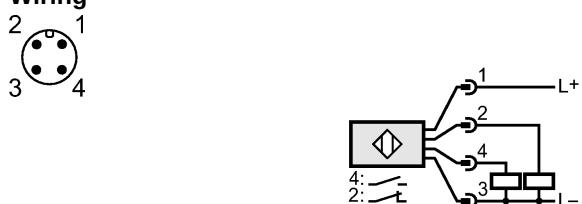Wiring**Remarks**

Remarks	*) Setting accuracy **) BFSL = Best Fit Straight Line / LS = Limit Value Setting
---------	---

Pack quantity	[piece]	1
---------------	---------	---