

Holtest

SERIES 368 – Holtest Three-Point/Two-Point Bore Micrometer Sets



368-907




368-912

Specifications

Metric

Code No.	Range	Graduation	Content of Set		
Two-point					
368-906	2 - 3 mm	0.001 mm	Micrometer head unit	2 - 2.5 mm	1 pc
				2.5 - 3 mm	1 pc
Setting ring	ø2.5 mm		1 pc		
Hex wrench			1 pc		
368-907	3 - 6 mm		Micrometer head unit	3 - 4 mm	1 pc
				4 - 5 mm	1 pc
			5 - 6 mm	1 pc	
		Setting ring	ø4 mm	1 pc	
		Hex wrench	ø5 mm	1 pc	
Three-point					
368-911	6 - 12 mm	0.001 mm	Micrometer head unit	6 - 8 mm	1 pc
				8 - 10 mm	1 pc
				10 - 12 mm	1 pc
			Setting ring	ø8 mm	1 pc
				ø10 mm	1 pc
			Extension rod	100 mm	1 pc
			Spanner		2 pcs
Hex wrench			1 pc		
368-912	12 - 20 mm		Micrometer head unit	12 - 16 mm	1 pc
				16 - 20 mm	1 pc
			Setting ring	ø16 mm	1 pc
			Extension rod	150 mm	1 pc
		Spanner		2 pcs	
		Hex wrench		1 pc	
368-913	20 - 50 mm	Micrometer head unit	20 - 25 mm	1 pc	
			25 - 30 mm	1 pc	
			30 - 40 mm	1 pc	
			40 - 50 mm	1 pc	
		Setting ring	ø25 mm	1 pc	
			ø40 mm	1 pc	
		Extension rod	150 mm	1 pc	
Spanner		2 pcs			
Hex wrench		1 pc			
368-914	50 - 100 mm	Micrometer head unit	50 - 63 mm	1 pc	
			62 - 75 mm	1 pc	
			75 - 88 mm	1 pc	
			87 - 100 mm	1 pc	
		Setting ring	ø62 mm	1 pc	
			ø87 mm	1 pc	
		Extension rod	150 mm	1 pc	
Spanner		2 pcs			
Hex wrench		1 pc			
368-915	100 - 200 mm	Micrometer head unit	100 - 125 mm	1 pc	
			125 - 150 mm	1 pc	
			150 - 175 mm	1 pc	
			175 - 200 mm	1 pc	
		Setting ring	ø125 mm	1 pc	
			ø175 mm	1 pc	
		Extension rod	150 mm	1 pc	
Spanner		1 pc			
Hex wrench		1 pc			

Note: It is not advisable to use measuring heads other than those supplied as standard accessories, or attempt to widen a measuring range by using any other heads. (The measuring accuracy in such cases is not guaranteed.)

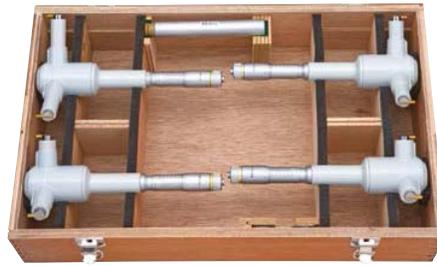

368-913



368-915



Specifications

Inch					
Code No.	Range	Graduation	Content of Set		
Two-point					
368-926	.08 - .12"	.0001"	Micrometer head unit	.08 - .1"	1 pc
				.1 - .12"	1 pc
			Setting ring	ø.1"	1 pc
			Hex wrench		1 pc
368-927	.12 - .28"	.0001"	Micrometer head unit	.12 - .16"	1 pc
				.16 - .2"	1 pc
				.2 - .24"	1 pc
				.24 - .28"	1 pc
			Setting ring	ø.16"	1 pc
			Hex wrench	ø.24"	1 pc
Three-point					
368-916	.275 - .5"	.0001"	Micrometer head unit	.275 - .35"	1 pc
				.35 - .425"	1 pc
				.425 - .5"	1 pc
			Setting ring	ø.35"	1 pc
				ø.5"	1 pc
			Extension rod	100 mm	1 pc
	Spanner	2 pcs			
	Hex wrench	1 pc			
368-917	.5 - .8"	.0001"	Micrometer head unit	.5 - .65"	1 pc
				.65" - .8"	1 pc
			Setting ring	ø.65"	1 pc
			Extension rod	150 mm	1 pc
			Spanner		2 pcs
			Hex wrench		1 pc
368-918	.8 - 2"	.0002"	Micrometer head unit	.8 - 1"	1 pc
				1 - 1.2"	1 pc
				1.2 - 1.6"	1 pc
				1.6 - 2"	1 pc
			Setting ring	ø1"	1 pc
				ø1.6"	1 pc
	Extension rod	150 mm	1 pc		
	Spanner	2 pcs			
	Hex wrench	1 pc			
368-919	2 - 4"	.0002"	Micrometer head unit	2 - 2.5"	1 pc
				2.5 - 3"	1 pc
				3 - 3.5"	1 pc
				3.5 - 4"	1 pc
			Setting ring	ø2.5"	1 pc
				ø3.5"	1 pc
	Extension rod	150 mm	1 pc		
	Spanner	2 pcs			
	Hex wrench	1 pc			
368-920	4 - 8"	.0002"	Micrometer head unit	4 - 5"	1 pc
				5 - 6"	1 pc
				6 - 7"	1 pc
				7 - 8"	1 pc
			Setting ring	ø5"	1 pc
				ø7"	1 pc
	Extension rod	150 mm	1 pc		
	Spanner	1 pc			
	Hex wrench	1 pc			

Note: It is not advisable to use measuring heads other than those supplied as standard accessories, or attempt to widen a measuring range by using any other heads. (The measuring accuracy in such cases is not guaranteed.)